

The FloBoss™ 104 Flow Manager



Remote Automation Solutions

Now one flow computer is cost effective for either rotary or turbine metering.



FloBoss 104 Sensor Assembly and Rotary Interface

The FloBoss™ 104 is a compact, high-performance flow computer that is cost effective for fiscal measurement. It performs API 21.1 compliant flow measurement when used with pulse-generating devices, such as rotary, turbine, and ultrasonic meters. The FloBoss 104 shares its advanced technology platform with the FloBoss 103, its orifice metering twin.

The FloBoss 104 mounts directly to a rotary or turbine meter and easily handles the slow rotational speed of a rotary meter or the high-speed pulse trains generated by most turbine meters. When line pressure and temperature are measured along with the pulse train, the FloBoss 104 can provide high-accuracy flow measurement.

The sensor assembly and rotary meter interface of the FloBoss 104 achieves superior performance over mechanical or conventional electronic measurement technology because it:

- Generates 1,000 pulses / revolution for high-resolution measurement
- Uses non-contact pulse sensing for outstanding reliability
- Has built-in pressure transducers to measure upstream and downstream pressure
- Provides bi-directional pulse detection and diagnostics for easy installation, setup, and maintenance
- Eliminates gear trains that load down the metering device and cause inaccuracies.


Applications

The FloBoss 104 is the ideal measurement solution for many natural gas applications. These include, but are not limited to:

- Well Injection (pressure)
- Tubing and Casing Pressure
- Custody Transfer
- Compressor Fuel Gas
- Farm Tap
- Industrial Usage
- Commercial Usage

API / AGA Compliant Flow Measurement

The FloBoss 104 calculates gas flow in accordance with AGA7 turbine flow calculations, using AGA8 compressibility methods. Pulse counts and pressure measurement come from the Sensor Assembly, and gas temperature is acquired through an external RTD probe.

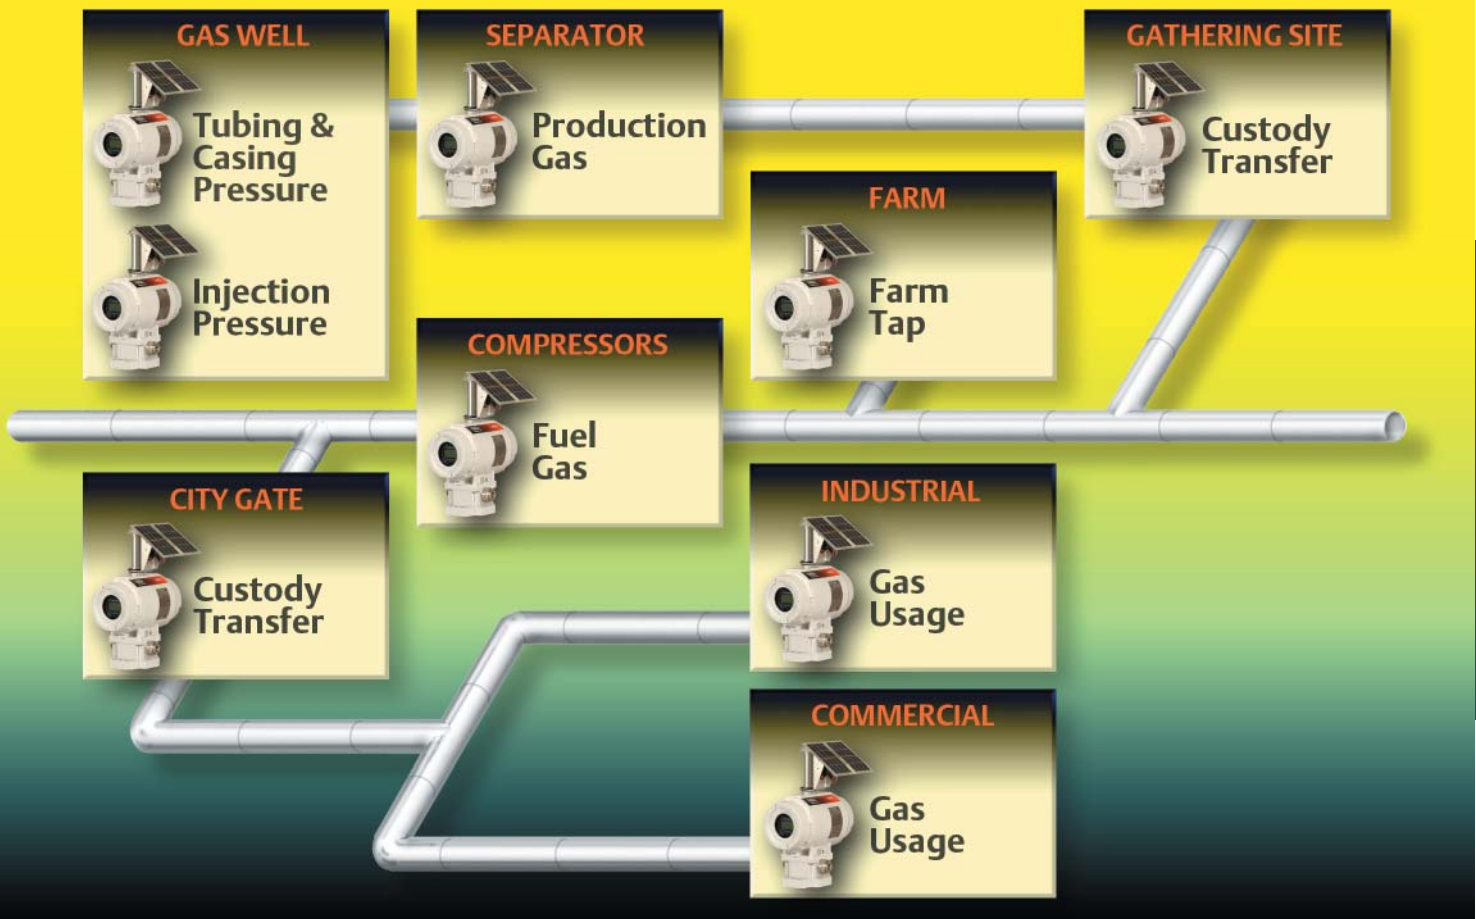

The FloBoss 104 is ideal for many natural gas measurement applications

The FloBoss 104 maintains API Chapter 21.1 compliant historical archives for measured and calculated values, as well as events and alarms. Up to 35 standard history points can be archived on an hourly and daily basis for up to 35 days. An extended history database supports data logging at intervals from 1 to 60 minutes, giving operators added flexibility to meet the requirements of advanced applications.

Local or Host Operation

The FloBoss 104 is configured and operated on-site using our Windows® based ROCLINK™ 800 Configuration Software. The FloBoss 104 can also be configured and operated from a computer running popular host software packages from Cygnet, Intellution, Standard Automation, US Data, and Wonderware among others. Modbus and native ROC protocols are supported.

More Communication Choices

The FloBoss 104 offers a built-in EIA-485 port and an optional EIA-232 port or dial-up modem port for host communications. An optional spread-spectrum radio interface supports either FreeWave M-Series or MaxStream 9X Stream spread-spectrum radios that fit entirely within the FloBoss 104 enclosure.

Expandable I/O

You can add six channels of I/O to the FloBoss 104 to further increase its measurement and control capabilities. Five of the channels are selectable by type and the sixth channel is a discrete output. Parameters for each of the I/O channels are software configured.

Built-in Control Capability

The FloBoss 104 can perform PID control on one loop using one analog or two discrete outputs. A wide range of control problems can be solved easily and quickly

with outstanding results. It can also perform logic and sequencing control by means of Function Sequence Tables (FSTs).

Low Power Consumption

The FloBoss 104 features low power consumption. It can operate for extended periods of time on just its built-in rechargeable batteries. Either a 2- or 5-watt solar panel is available to keep the batteries charged.

Rugged Construction

The explosion-proof, type 4 enclosure has a Class I Div. 1 rating when properly installed. When the optional solar panel mast is attached, the enclosure has a Class I Div. 2 rating. The optional two-line LCD display lets you view selected data stored in the FloBoss 104.

Support Problems Solved

Doing business with Emerson Process Management gives you the confidence that the products, services and solutions you buy are backed by our unmatched global support. And Emerson's industry expertise will help you achieve the performance and profitability goals you are measured by.

The information and support you need can be as close as your telephone or web browser, or right around the corner. With over 600 locations in more than 85 countries, chances are we have an office near you.

Technical support for your ROC, FloBoss™, and related products is also available directly from the Internet with SupportNet™ Technical Services. Whether you need software or firmware updates, or just have a technical question, SupportNet can make your job easier. And best of all, SupportNet is available to you 24 hours a day, seven days a week.

SupportNet gives you an easy and convenient means to get answers to technical questions or solutions to product problems. You have access to our extensive knowledge base of information, as well as to our factory-trained technical support team. You also have access to e-learning modules that provide audio-visual training on a variety of topics.

You can enjoy even more benefits with SupportNet Express or SupportNet Plus, subscription services that give you valuable on-line tools designed to meet your technical support needs.

© 2004 - 2007, Remote Automation Solutions, division of Emerson Process Management.
All rights reserved.

Bristol, Inc., Bristol Babcock Ltd, Bristol Canada, BBI SA de CV and the Flow Computer Division, are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions ("RAS"), a division of Emerson Process Management. ROC, FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of RAS. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. RAS reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by RAS' terms and conditions which are available upon request. RAS does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any RAS product remains solely with the purchaser and end-user.

Remote Automation Solutions

Phone (641) 754-3449
Toll Free (800) 807-0730 (US & Canada only)
FAX (641) 754-3630

www.EmersonProcess.com/Remote

Remote Automation Solutions

