


Farris 2700 Series Safety Relief Valves

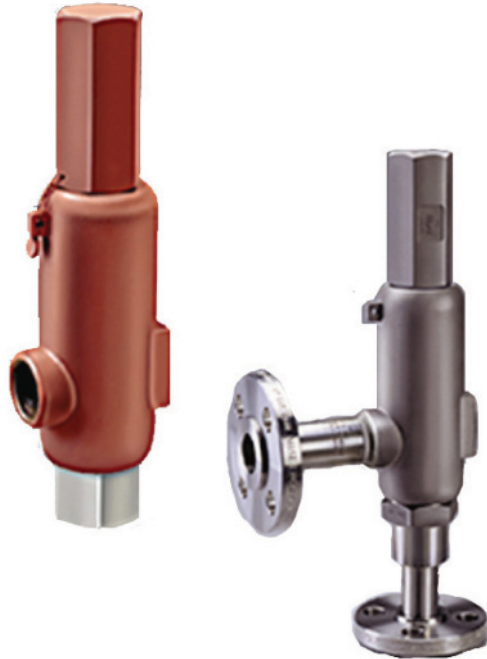

- **ASME NB Certified for Air, Water and Steam Service**
- **European CE Approved**

- Sizes 1/2" X 1" to 1 1/2" X 2 1/2"
- Effective orifice areas from 0.068 to 0.573 square inches
- Pressures from 15 to 6500 psig
- Temperatures from -450°F to 750°F
- Stainless steel body, spring and trim with a carbon steel bonnet
- Full NACE is available by merely installing an Inconel spring
- Available design connections include: threaded, flanged and socket weld
- Standard seat design is metal to metal but is also available in an optional o-ring design
- The "C" and "D" orifices come in a balanced design which nullifies the effects of backpressure on the performance of the valve
- Large shop inventory located in Edmonton allowing for quick (same day) shipment